

800X | INTENSE 1600MM | HIGHGLOSS



MODERNITY

Our exclusive modern design assortment will brighten up your spaces.

Why Mozilla?

MOZILLA GRANITO & GROUP OF COMPANIES

has been in tiles business since last 21 years and successfully gain the trust of every customer and dealers. The quality of our product makes it more durable than any other. Our authenticity, curiosity and our incredible empathy are the main pillars behind our great relationship with our customers.

Mozilla Granito has been believing in the principle of making lives better. Whether it is your living spaces or offices or some places like malls, restaurants, hotels that sees high footfalls, our products are an exceptional choice for everywhere you like.





CALACUTTA BLACK


800X 1600MM





ETERNAL BLACK


800X 1600MM

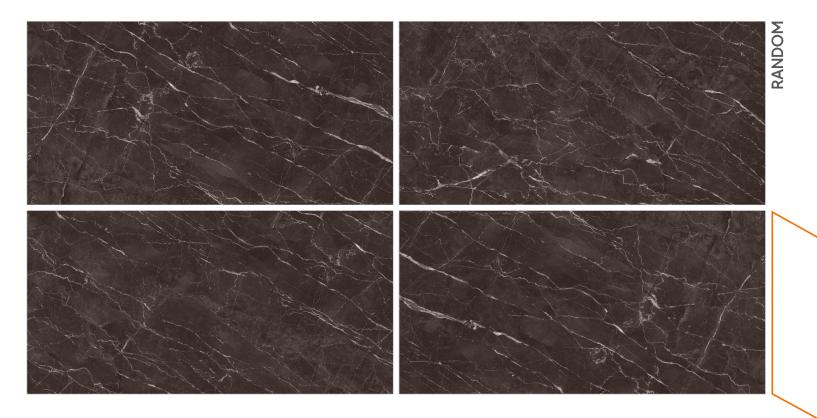



LAPONIA BLACK


800X 1600MM

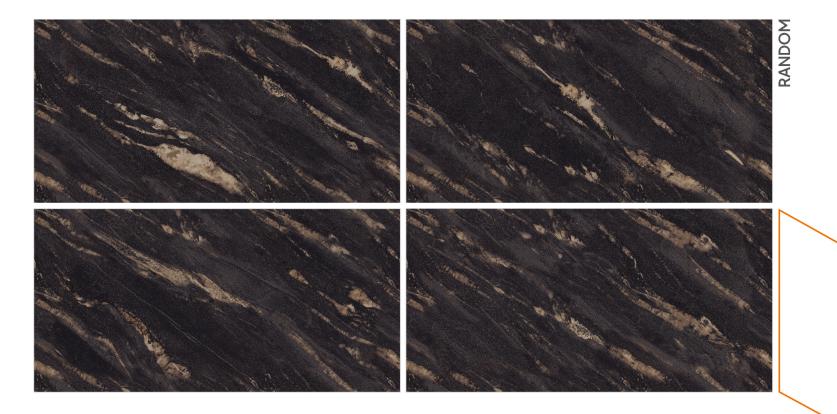



NOIR BLACK


800X 1600MM

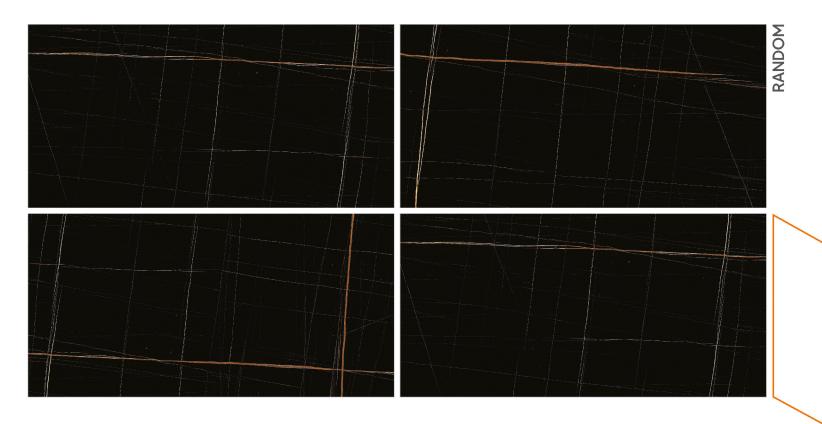



PEAR ONYX


800X 1600MM

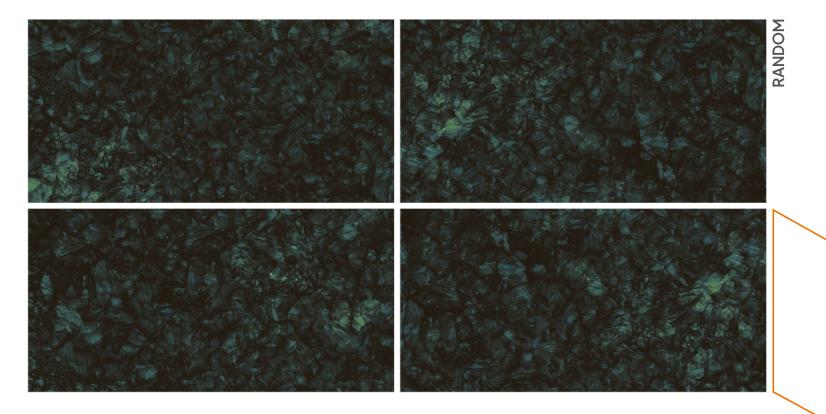



REGIA OCEAN

800X 1600MM

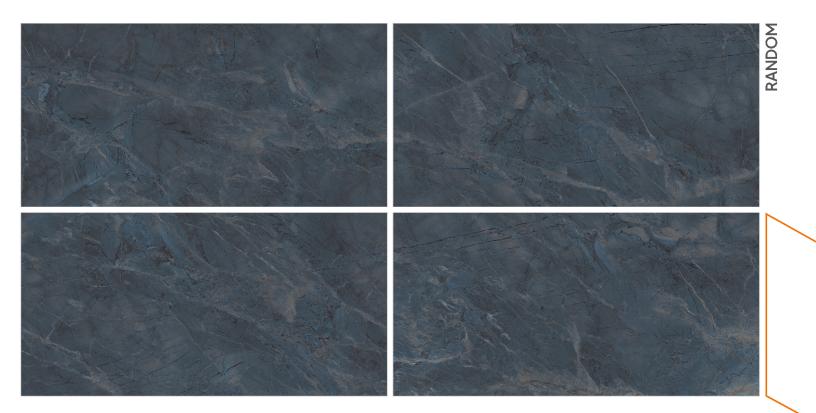



SAINT PORTO BLACK


800X 1600MM





TRAVEX BLACK


800X 1600MM

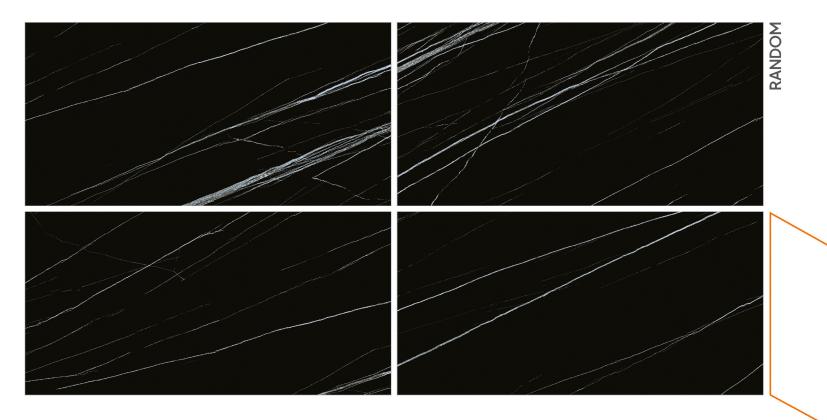



VOLGA BLUE

800X 1600MM

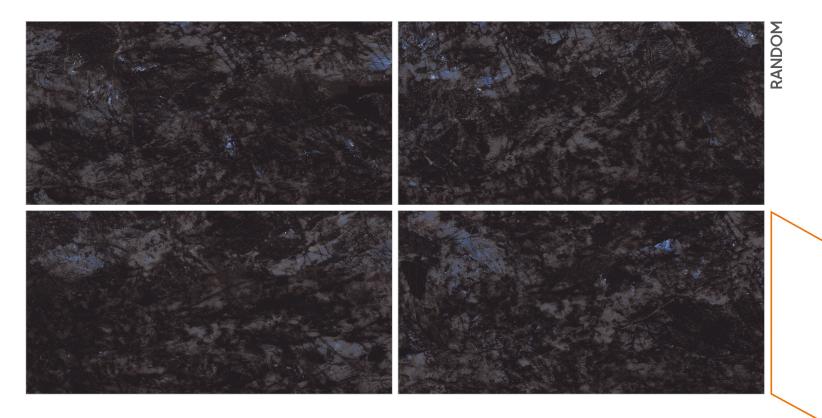


TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER IS0-13006/EN14411 GROUP Bla	VALUE	TEST METHOD
REGULATORY PROPERTIES			
Deviation in length & width	±0.5 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	GLOSSOMETER
STRUCTURAL PROPERTIES			
Water absorption	< 0.50 %	< 0.05 %	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPE			
Modulus of rupture	Min. 35 N/mm2	Min. 40 N/mm2	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROP	ERTIES		
Surface abrasion resistance	As per mfg	Min. Class-3	ISO-10545-7
MOH's hardness	As per mfg	Min. 4	EN 101
THERMO HYGROMETRIC PROF	PERTIES		
Frost resistance	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10-6	Max. 6.5 x 10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	SO-10545-14
SAFETY PROPERTIES			
Slip resistance	As per mfg	> 0.40	ISO-10545-17
Fire resistance	As per mfg	Fireproof	N. A.
Lead & Cadmium given off	As per mfg	Does not yield	ISO-10545-15
by glazed tiles		Pb & Cd	

PACKING DETAILS

Size	Tiles / Box	Coverage Area / Box	Coverage Area / Box
80X160CM	2 pcs	2.56 Sq. m.	27.55 Sq. ft.

Note: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.

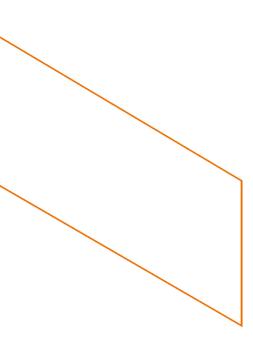

MOZILLA GRANITO LLP.

Regd. Off-Sr no.144/1/P/9, 8 - A National Highway, Opp. Dariyalal Hotel, Post Rafaleshwar, Tal & Dist. Morbi 363642, Gujarat (INDIA)

+91 98252 22858 mozillagranitollp2021@gmail.com

mozillagranito.com