

MOZILLA
EXQUISITE SURFACES

800x
1600mm

**GRACEFUL
PIECE OF ART
FOR YOUR SPACE**



800X
1600MM

MATT



SIGNIFICANT


Enlighten your space with the most significant
style of our collection.

Why Mozilla ?

MOZILLA GRANITO & GROUP OF COMPANIES

has been in tiles business since last 21 years and successfully gain the trust of every customer and dealers. The quality of our product makes it more durable than any other. Our authenticity, curiosity and our incredible empathy are the main pillars behind our great relationship with our customers.

Mozilla Granito has been believing in the principle of making lives better. Whether it is your living spaces or offices or some places like malls, restaurants, hotels that sees high footfalls, our products are an exceptional choice for everywhere you like.



MARBLE TOUCH
next level slab



BERLINGTON GREY COL

RANDOM

800X
1600MM | **MATT**

> **Prestige**
Banquet Halls



BERLINGTON NERO COL

RANDOM

800X
1600MM | **MATT**

MARBLE TOUCH
next level slab



BERLINGTON SILVER COL

RANDOM

800X
1600MM | **MATT**

> **Prestige**
Banquet Halls




**BERLINGTON
SMOKE COL**

RANDOM

800X
1600MM | **MATT**

MARBLE TOUCH
next level slab

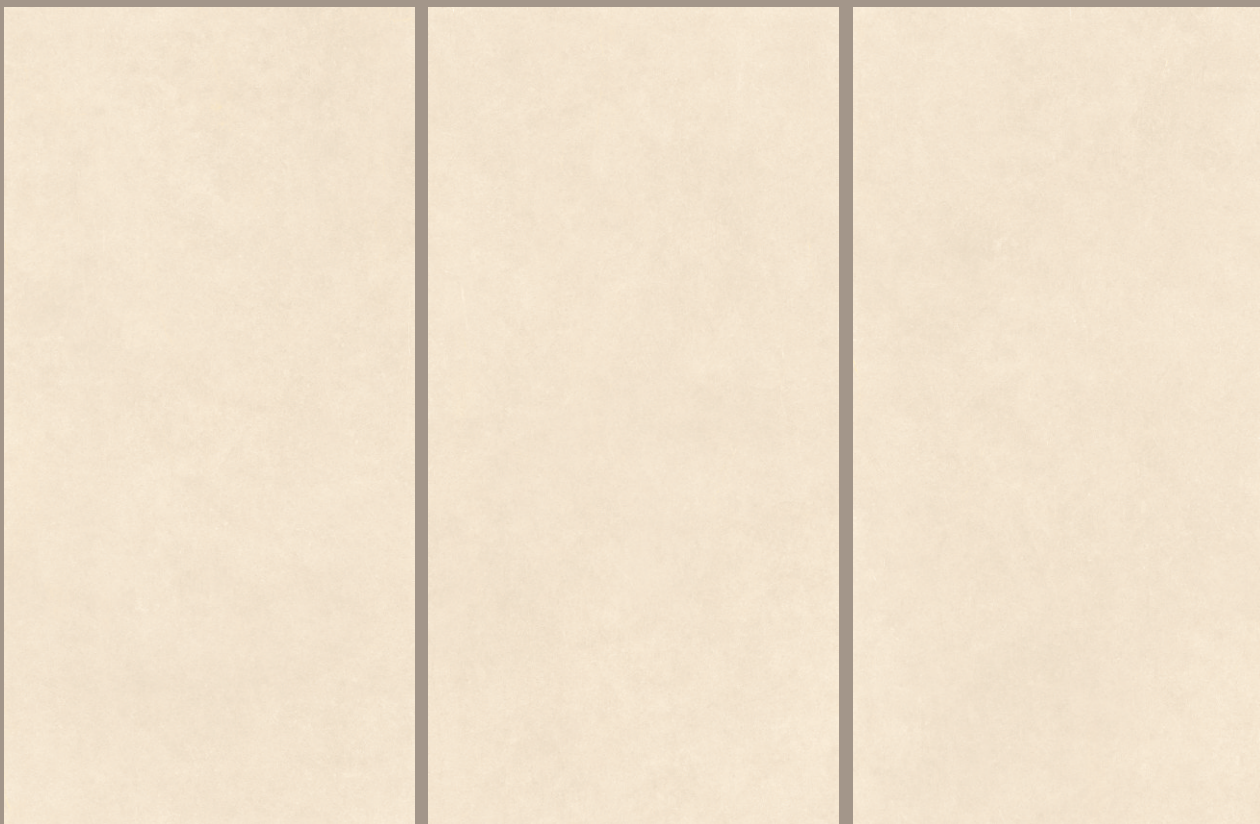


MAGNIFICA BEIGE

RANDOM

800X
1600MM | **MATT**

> **Prestige**
Banquet Halls

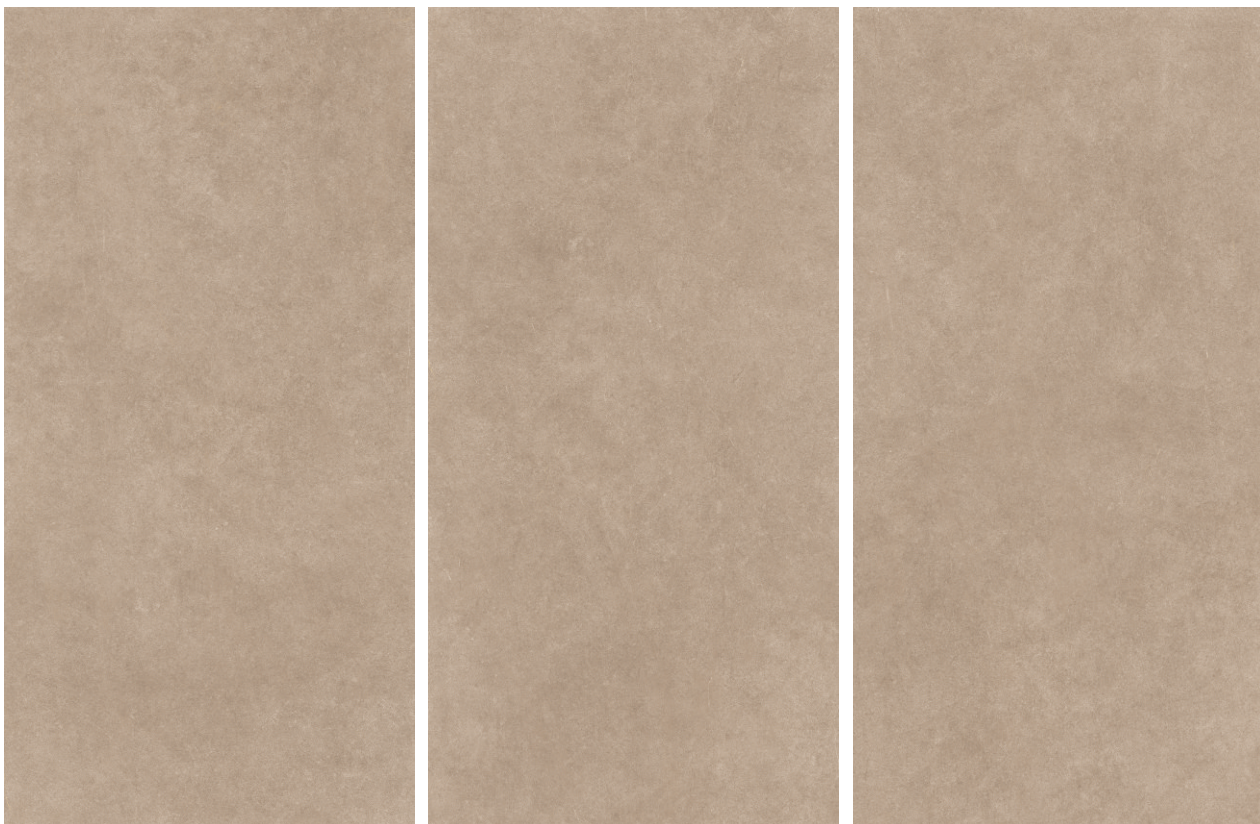


MAGNIFICA BROWN

RANDOM

800X
1600MM | **MATT**

MARBLE TOUCH
next level slab

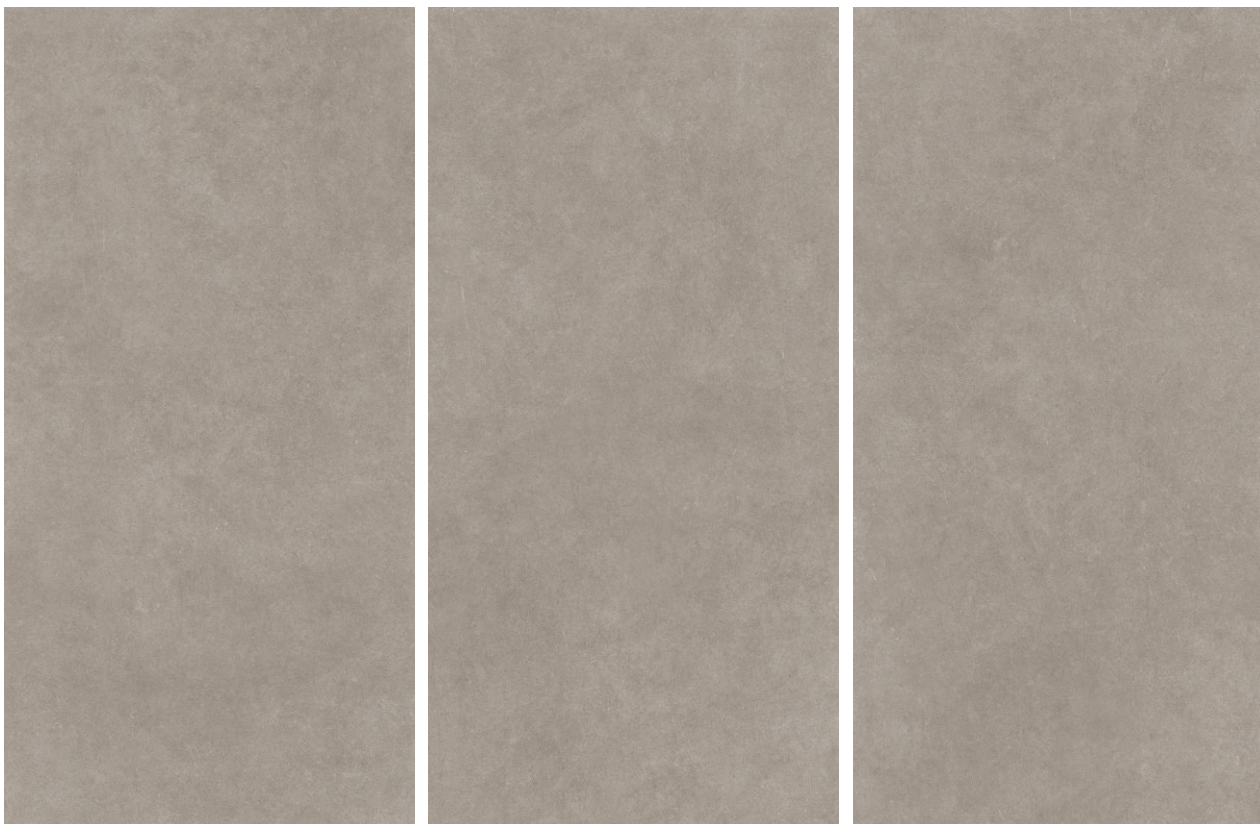

MAGNIFICA GRIS

RANDOM

800X
1600MM | **MATT**

> **Prestige**
Banquet Halls



**MAGNIFICA
SILVER**

RANDOM




TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN14411 GROUP Bla	VALUE	TEST METHOD
REGULATORY PROPERTIES			
Deviation in length & width	±0.5 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	GLOSSOMETER
STRUCTURAL PROPERTIES			
Water absorption	< 0.50 %	< 0.05 %	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES			
Modulus of rupture	Min. 35 N/mm ²	Min. 40 N/mm ²	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES			
Surface abrasion resistance	As per mfg	Min. Class-3	ISO-10545-7
MOH's hardness	As per mfg	Min. 4	EN 101
THERMO HYGROMETRIC PROPERTIES			
Frost resistance	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES			
Chemical resistance	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	SO-10545-14
SAFETY PROPERTIES			
Slip resistance	As per mfg	> 0.40	ISO-10545-17
Fire resistance	As per mfg	Fireproof	N. A.
Lead & Cadmium given off by glazed tiles	As per mfg	Does not yield Pb & Cd	ISO-10545-15

PACKING DETAILS

Size	Tiles / Box	Coverage Area / Box (approx.)	Coverage Area / Box (approx.)
80X160CM	2 pcs	2.56 Sq. m.	27.55 Sq. ft.

Note: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.

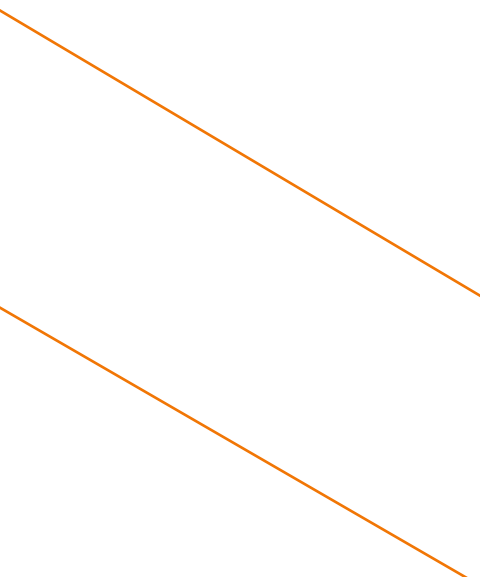

MOZILLA GRANITO LLP.

Regd. Off-Sr no.144/1/P/9, 8 - A National Highway,
Opp. Dariyalal Hotel, Post Rafaleshwar,
Tal & Dist. Morbi 363642, Gujarat (INDIA)

+91 98252 22858
mozillagranitolp2021@gmail.com

mozillagranito.com